

SANVT

CERAMIK

ISO 9001:2015
COMPANY

SANVT
CERAMIK

+91-7227902122

support@sanvtceramik.com

Office No - 1, 3rd Floor, Agrawal Mall, Landmark - Sola Bhagwat Vidhyapith,
S.G. Highway, City- Ahmedabad - 380060, Gujarat, India. Tel. +91(79) 40397757

www.sanvtceramik.com

FULL BODY



VILLAGE SAND DK - Size: 600 x 600mm




VILLAGE SAND

Size :600 x 295mm



VILLAGE SAND

Size :295 x 295mm

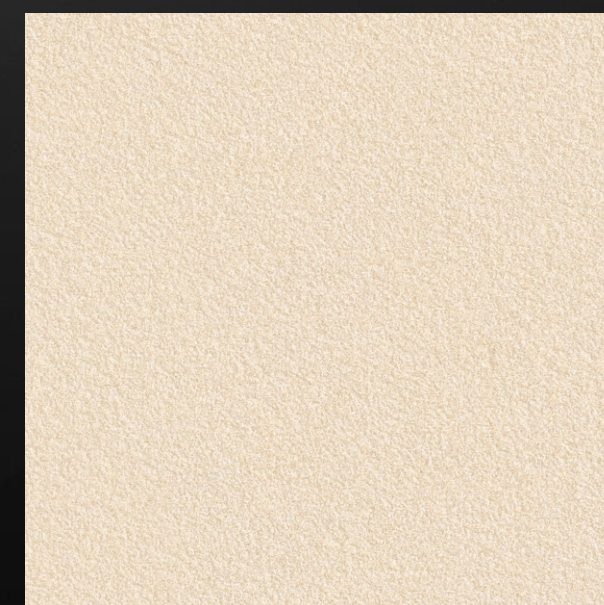


VILLAGE CAPPUCCINO L - 600 x 600mm




VILLAGE CAPPUCCINO

Size :600 x 298mm




VILLAGE CAPPUCCINO

Size :298 x 298mm

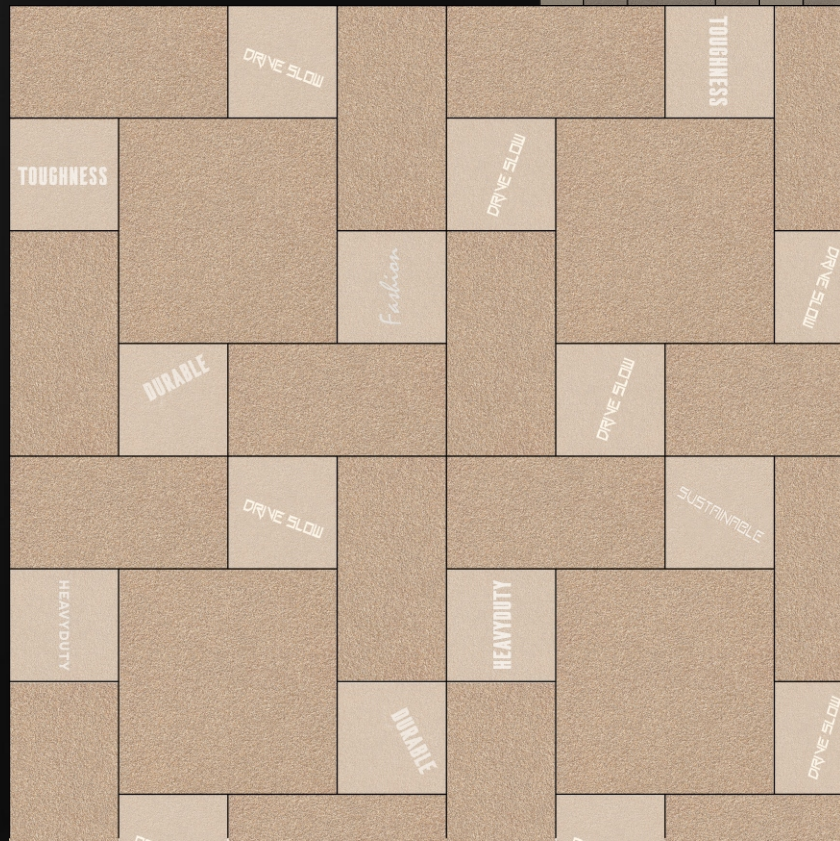

VILLAGE SAND

Size :295 x 295mm



VILLAGE CAPPUCCINO


Size :295 x 295mm



VILLAGE SAND DK - Size: 600 x 600mm




VILLAGE CAPPUCCINO L - 600 x 600mm




VILLAGE SAND

Size :600 x 295mm

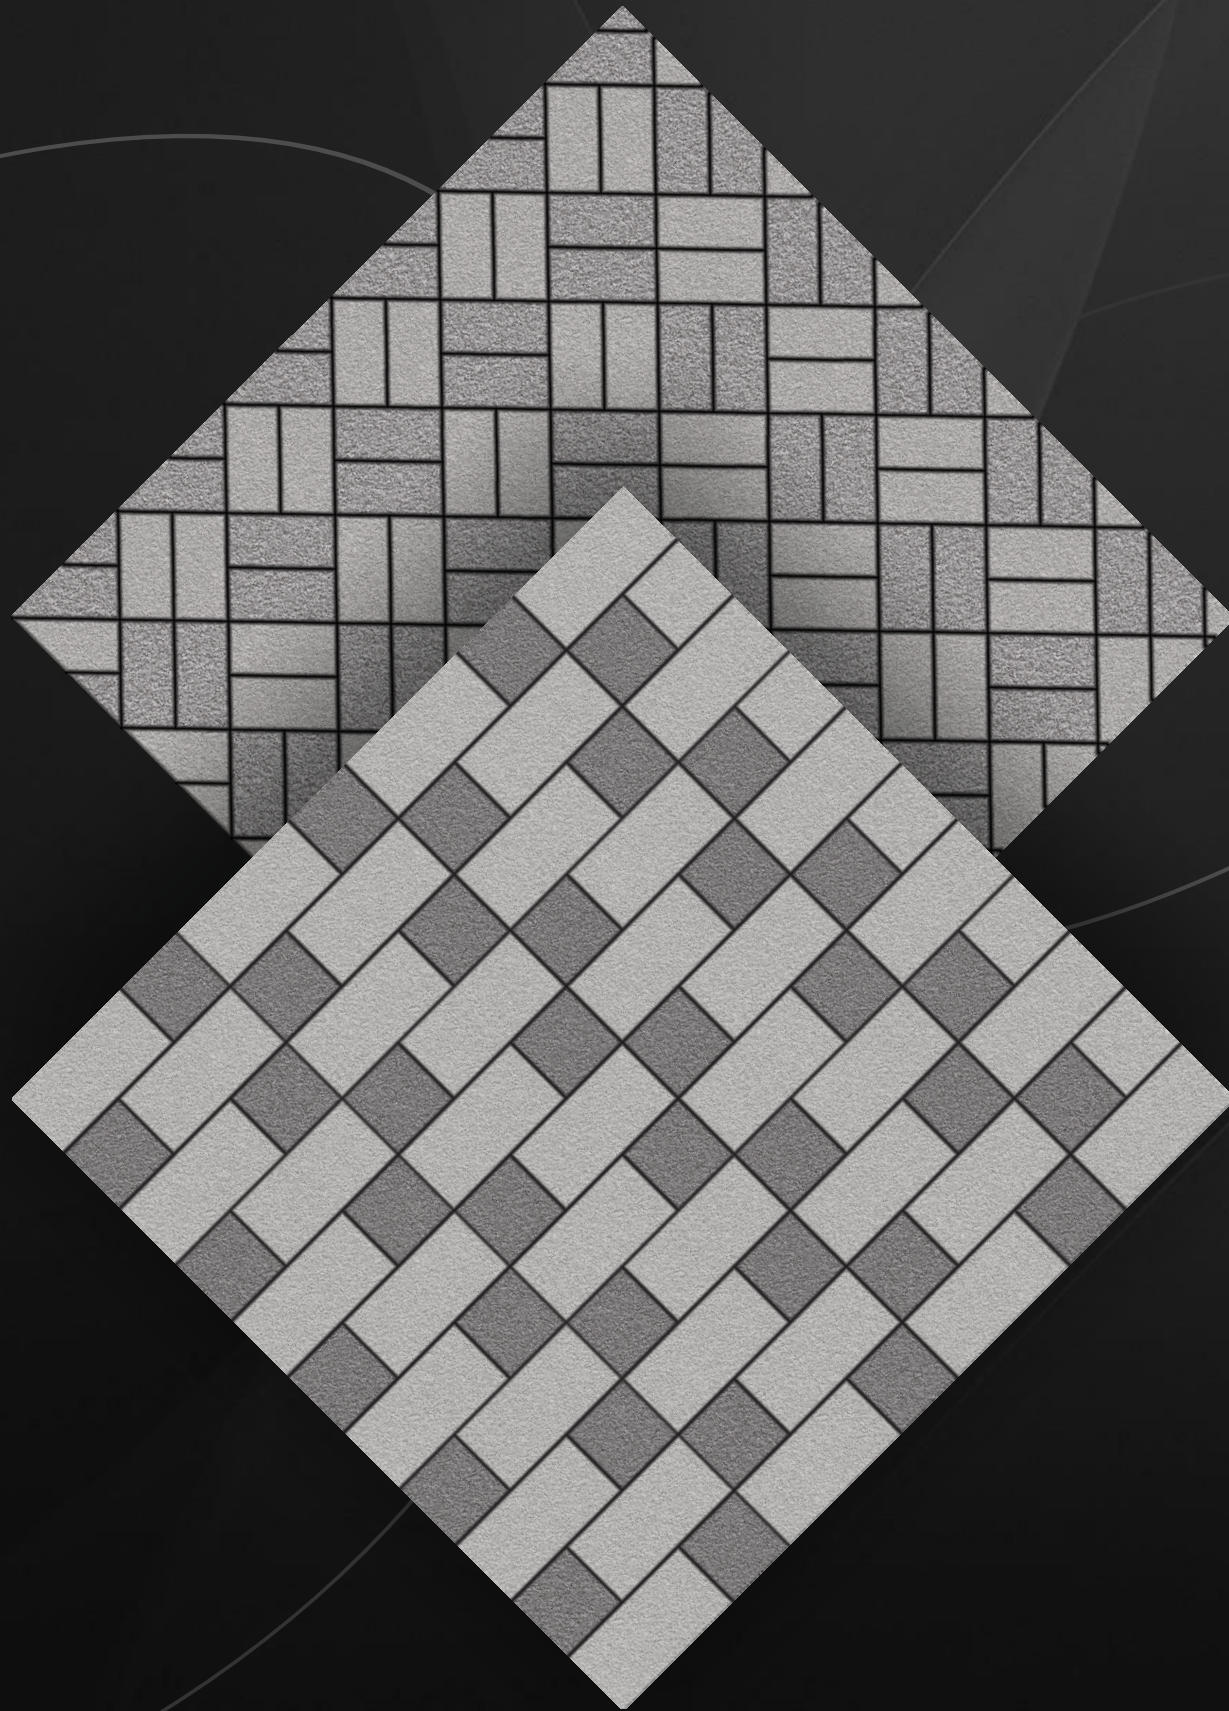

VILLAGE GRIS DK - 600 x 600mm

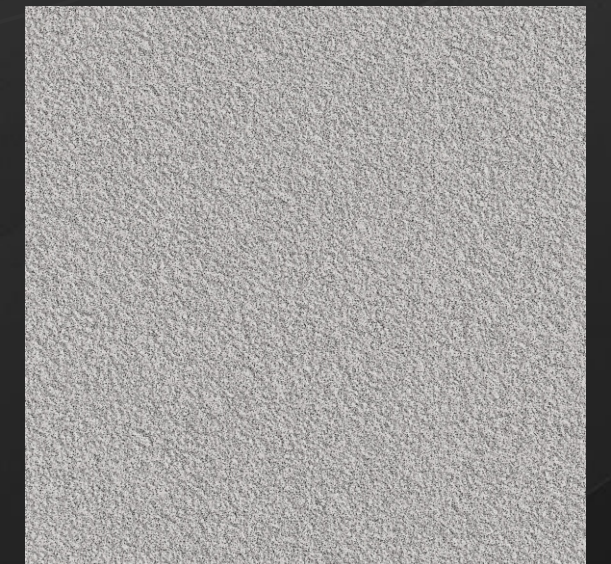

VILLAGE GRIS LT - 600 x 600mm



VILLAGE GRIS DK - 295 x 600mm




VILLAGE GRIS LT - 295 x 600mm



Size :295 x 295mm

VILLAGE GRIS DK



Size :295 x 295mm

VILLAGE GRIS LT

TECHNICAL SPECIFICATIONS OF 600 X 600MM FULL BODY TILES

TECHNICAL DETAILS

CHARACTERISTIC	Requirements as per IS15622:2006 0.08<E< Group B1b	VALUE OF SANVT	TEST METHOD
A) Dimension & Surface Quality			
i) Length & width	± 0.10%	±0.10%	IS 13630 Part 1 : 2006
ii) Thickness	± 4.0%	± 4.0%	IS 13630 Part 1 : 2006
iii) Straightness of side	± 0.10%	±0.10%	IS 13630 Part 1 : 2006
iv) Rectangularity	± 0.10%	±0.10%	IS 13630 Part 1 : 2006
v) Surface flatness			
a) Centre Curvature (%) (Max. Deviation)	±0.2%	±0.2%	IS 13630 Part 1 : 2006
b) Edge Curvature (%) (Max. Deviation)	±0.2%	±0.2%	IS 13630 Part 1 : 2006
c) Corner Warpage (%) (Max. Deviation)	± 0.2%	± 0.2%	IS 13630 Part 1 : 2006
vi) Surface quality	>95 % free from visible defects	>95 % free from visible defects	IS 13630 Part 1 : 2006
B) Physical properties			
i) Water Absorption	Avg. ≤ 3%, individual 3.3 max	Avg. ≤ 0.15 % , max 0.25%	IS 13630 Part 2 : 2006
ii) Modulus of Rapture(N/mm2)	Avg. 38, Individual 35 min	Min 38	IS 13630 Part 6 : 2006
iii) Breaking Strength in N	1200	Min 1500 N	IS 13630 Part 6 : 2006
iv) Scratch Hardness of surface (mohs)	min 6 (commercial) min 5 (home)	min 5	IS 13630 Part 13 : 2006
v) Surface Abrasion Resistance	Min Class III (Commercial) Min Class II (Residential)	Min class III for (FP) Min Class V for(rustic)	IS 13630 Part 11 : 2006
vi) Coefficient of linear thermal expansion from ambient temperature to 100° c	max. $7 \times 10^{-6} K^{-1} \text{Max}$	max $7 \times 10^{-6} K^{-1} \text{Max}$	IS 13630 Part 4 : 2006
vii) Thermal Shock resistance	10 Cycle min	10 Cycle min	IS 13630 Part 5 : 2006
viii) Crazing Resistance	4 Cycle @ 7.5 bar min	4 Cycle @ 7.5 bar min	IS 13630 Part 9 : 2006
C) Chemical resistance (Glazed tiles)			
i) Stain resistance	Min Class - 1	Min Class - 1	IS 13630 Part 8 : 2006
ii) Resistance to house hold Chemicals	Min Class AA	Min Class AA	IS 13630 Part 8 : 2006
iii) Resistance to acids and alkalis (With exception of Hydrofluoric acid and its Compounds)	Required if agreed	Min Class AA	IS 13630 Part 8 : 2006

PACKING DETAILS

SIZE	NO. OF TILES PER BOX	COVERAGE AREA	THICKNESS	AVG.WT.PER.BOX
600 X 600mm	2pcs.	0.72 sq.mtr	16mm	26kg.

The production of the tiles in this category is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. "Technical Specification" for Sanvt floor tiles are applicable only for premium quality tiles . please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid / fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.

APPLICATION AREAS

